


PP Compression fittings PN16

PP Compression fittings PN16 are designed especially for polyethylene (PE) pipe connection. These fittings are compatible with polyethylene pipes, according to EN 12201.

Our range of compression fittings allows a fast and secure connection of polyethylene tubing for any industrial, commercial or domestic need. Available in diameter from 16 mm to 110 mm and with maximum operating pressure of 16 bar (16-75 mm) and 12.5 bar (90-110 mm).

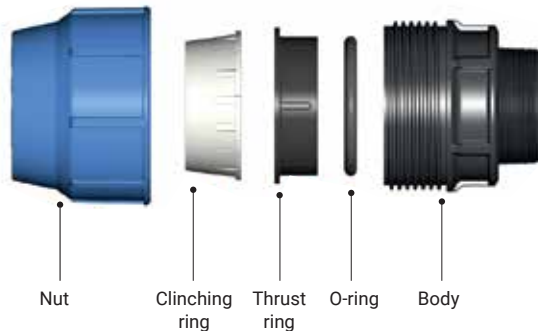

Features

- Certified by DVGW and KIWA and produced according to EU norms and standards
- Produced from primer raw material. Certified for drinking/potable water
- Precise threads, according to EU standards
- Excellent long-term pressure resistance
- High-quality O-ring, coated with silicone
- Strong clinching ring
- Female fittings are with reinforcing metal ring
- Fitting nut has 4-6 threads, providing stronger connection and better pull-out characteristics

Specifications and Technical data

Size	16-110 mm
Nut	Blue Polypropylene (PP-B)
Clinching Ring	Polyacetal (POM)
Thrust Ring	Black Polypropylene (PP-B)
O ring - gasket	Ethylene propylene diene monomer rubber (EPDM)
Body	Black Polypropylene (PP-B)
Reinforcing metal ring	Galvanized steel
Operating Pressure	16 bar (16-75 mm) 12.5 bar (90-110 mm)
Design	ISO 17885
Size	ISO 3126
Threads	ISO 7-1
Markings	ISO 17885
Quality Management	ISO 9001
Pipes Suitability	Polyethylene (PE) pipes, in accordance with EN 12201
Effect on water quality	According to national regulations
Pull out resistance	ISO 3501
Resistance to internal pressure when subject is bended	ISO 3503, DIN 8076
Resistance to internal pressure (1 hour)	ISO 3458, ISO 1167-1, ISO 1167-2, DIN8076
Resistance to internal pressure (1000 hours)	ISO 13846; ISO 1167-1, ISO 1167-2, DIN8076

NOTE

DVGW, KIWA, WIEN-ZERT, ITC, UBA and OIB certificates are valid for Ø20 mm to Ø75 mm.